



RP703 Double Progress Capture Pulley (non locking)

Data Sheet





climb. work. rescue.

I/S/C

SOLUTIONS IN METAL

The ISC Progress Capture Pulleys feature a new lightweight centre plate, re-positioned wheel to reduce rope friction and a rated Becket, through which even a ANSI Karabiner can be fully rotated. The RP703 is fitted with tamper-proof rivets and is individually serial numbered. The cam-face is coned to minimise rope wear.

(PPE Directive 89/686/EC)

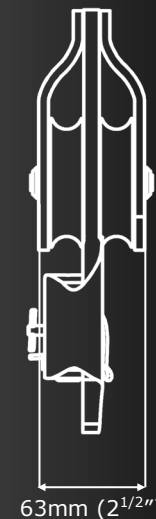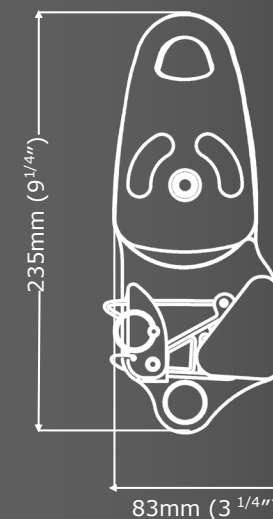

Weight	905g (32oz)
Body Material	Aluminium
Finish	Anodised
Rope Size	10-13mm (3/8"-1/2")
WLL	800kg (1764lbs)
MBS	40kN (8992lbf)
Standards	EN12278, EN567 NFPA 1983