

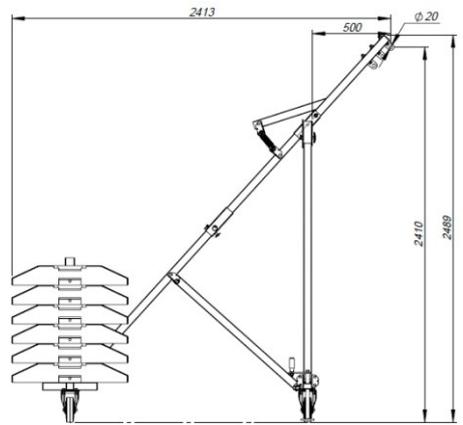


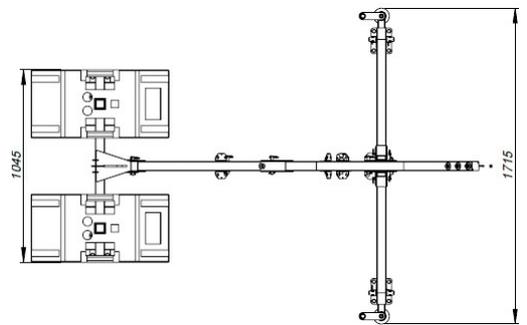



# ZERO DAVTEX MOBILE CANTILEVER ANCHOR POINT ADW00XM

EN795/B  
TS 16415/B  
IRATA


1

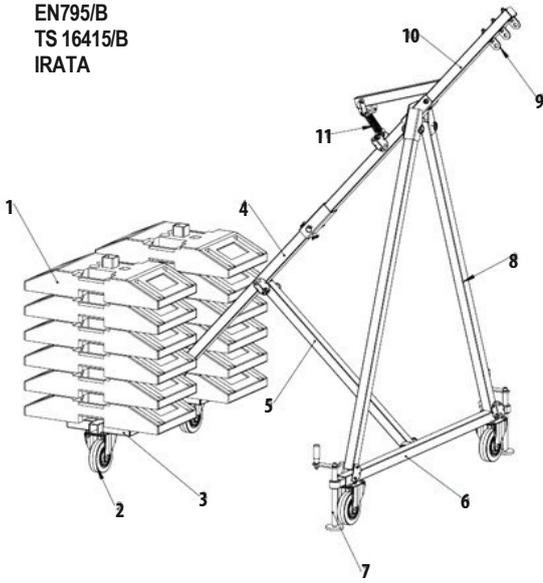

4

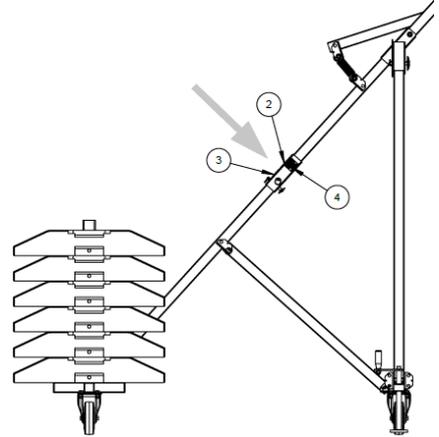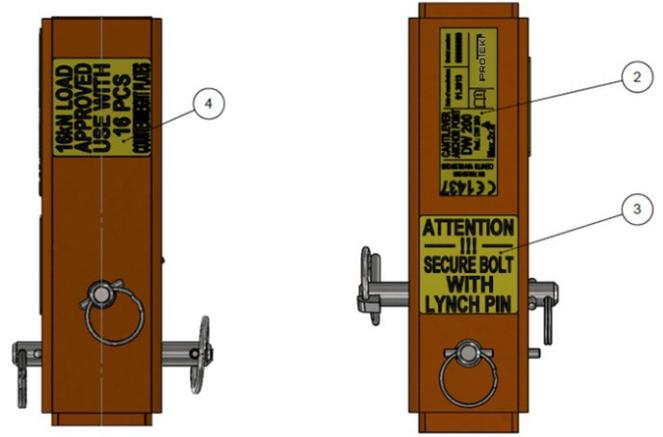

5

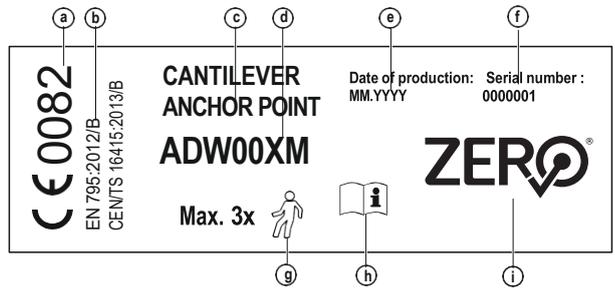

## EN

EN – NOTE: Before use of this device please read and understand this instruction manual.

### 1. GENERAL DESCRIPTION

DW 200 is a component of personal protective equipment against falls from a height complied with EN 795:2012 and TS 16415:2013 as anchor device type B. It is used for connecting a fall arrest system (e.g. energy absorber to lanyards, fall arresters, cables of fall arresters) in accordance with Directive of the European Parliament 2001/45/EC. The device is suitable for protection of max. three people at the same time.

NO	TABLE 1 – PARTS DESCRIPTION	Quantity
1	Counterweight	TABLE 2
2	Rubber pad wheels 160 mm	4
3	Rear beam (for counterweight installation)	1
4	Lower Jib	1
5	Rear support	1
6	Frontbeam	1
7	Support for front beam	2
8	Front support	2
9	Anchor point	3
10	Upper jib	1
11	Energy absorber	1

Counterweight type	TABLE 2 – COUNTERWEIGHT QUANTITY	
	Quantity [pcs]	
	EN 795/ TS 16415 14kN static test force 3 people at the same time	IRATA* 15kN static test force 2 people at the same time
25kg counterweight plate	12	14
20kg counterweight plate	16	18

\*ADW00XM conform requirements of IRATA document F3.4 – Counterweight Anchors requirements (15kN static test force is required. Device was tested with force 16kN).

All components of the device are made of powder coated steel. Weight of each particular component is less than 25kg, enabling the device to be handled and installed by a single person. Wheels provided with the device facilitate positioning of the assembled frame at the work site. The device is intended for use on roofs and in places without window sills, in particular.

3

